

Vision Blind Installation Guide

Buy
My
Blinds
Online.co.za

Outside Fitting

Before You Start


Unpack the vision blind/s being very careful not to damage the blind/s or chain when cutting through the packaging. Unwrap the plastic that is protecting your blinds. Included with your blind/s are the following parts: Open Type Cassette, Gold Screws, Fischer Plugs, Child Safety chain tie back.

Step 1

Make yourself familiar with your vision blind. ALWAYS KEEP IT LEVEL. DO NOT REMOVE THE BLIND FOR THE FRONT PIECE OF MATERIAL IS FIXED TO THE CASSETTE. On the control side you will have a slide in slot, with a hook. On the other side you will have the spring operating pin. On the inside of the Open Cassette you will see the fixed brackets on the sides. You will see that the shape of the hook and pin is exact of the set of brackets you received.

Step 2

Take your blind and make sure it overlaps your window opening perfectly. Your sides overlapping all depends how you measured, normally by 50mm on each side, as well as the height. Take your L-Shaped brackets and place it 50mm above the corners of your window flash with the wall - take a pencil and mark within the holes, this is where you should drill.

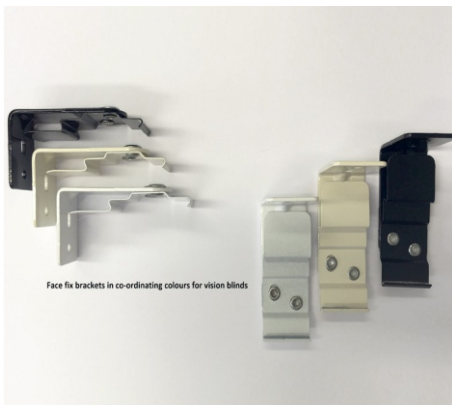

Above: Image of Vision facefix brackets

Please note blinds wider than 1200mm will need supporting brackets in middle.

Step 3

Take a 6mm drill bit and drill where you marked with a pencil. Take your Fischer plug and insert them into the new holes. Take your gold screws and put them through the bracket and into the plugs. Take a phillips screw drives and tighten. TIP: It is always best to use electric drills/screwdrivers for this part.

Make sure the clips are tight and facing you perfectly straight.

Step 4

Take your blind and look at the top grooves. there you will see where the brackets will clip and fix to the wall. YOU SHOULD ALWAYS START WITH THE FRONT CLIP.



Step 5

Still keeping the blind nice and level, angle the blind with the back part angled lower than the front. Doing this allows you to easily clip the front side to the loop shape of your bracket. Do this with all brackets before you push the back side of the blind up. Once all front is level and looks right, use your fingers as per images below and push up. Remember to push the blind toward you to get that CLICK sound. Once you hear the click sound, move on to the next bracket.




Step 6

Test the blind that the blind is secured to all the brackets pulling slightly down where all brackets are. If it seems like its loose, then just push the back part of the blind until you hear the click sound.

Step 7

Lastly secure the child safety chain tie back to the side where the chain loops - Optional.

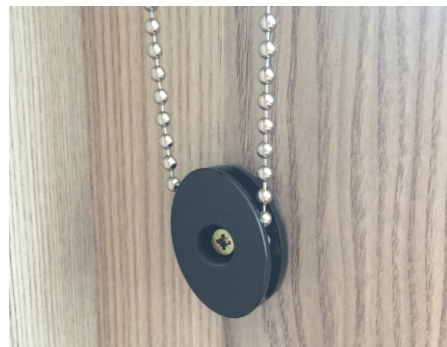

Step 8

Congratulate yourself! you have now installed your own blind, with the above steps you now have a premium custom made blind with a full 2 year warranty. Now tell your friends about us, and we will be waiting for your next order.

Thank you

Team BuyMyBlindsOnline.co.za
011 868 1546

part of the GalaxyBlinds group

